

A Quality Product from Hawkeye Industries, Inc.



## Duratec® Vinyl Ester **Fairing Primer**

***A high quality “sprayable putty” for fairing and priming composite marine surface - an integral part of the Duratec Marine System.***

### **Usage**

For one-off and production composite yacht priming and osmosis and blister repairs. Formulated for below-waterline, topside and deck surfaces.

Here's why you should choose Duratec Ester Vinyl Ester Fairing Primer-

### **Application**

Apply with sprayer, roller or brush. Saves time and labor.

High build to 2-4mm, 80-160 microns, wet on wet, without sagging on vertical surfaces.

### **Quick Cure**

Rapid curing; far faster than epoxy resin systems. Primer will be ready to sand in 1-5 hours, depending on thickness and temperature.

### **Osmosis & Blister Resistance**


The glass microsphere filled primer offers excellent resistance against osmosis and blister damage. The vinyl ester chemistry has proven its performance on more than 2000 boats and yachts over a seven-year period.

### **Easy Sanding**

Hollow glass microspheres in the primer allow for rapid sanding. Also saves time and labor.

## **Duratec Vinyl Ester Fairing Primer**

1799-052 Blue

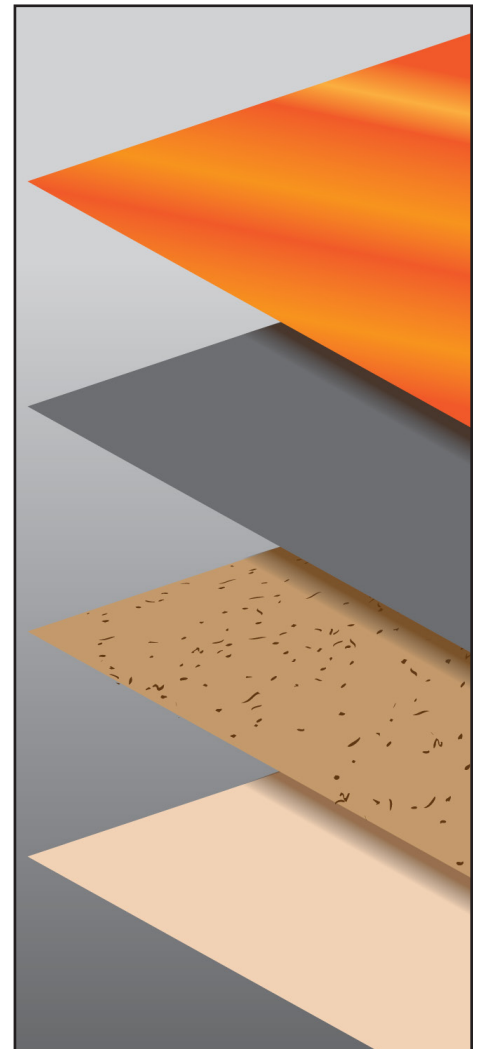

### **Hawkeye Industries**

P. O. Box 415, Bloomington, CA 92316  
(USA) 800-977-0060 • (Outside USA) 909-546-1160 • Fax 909-546-1161  
Email: [hawkeyesales@hawkeyeind.com](mailto:hawkeyesales@hawkeyeind.com) • [www.duratec1.com](http://www.duratec1.com)

Limited/ warranty statement: Our products are intended for sale to industrial and commercial customers. We request that customers inspect and test our products before use and satisfy themselves as to contents and suitability. Nothing herein shall constitute a warranty, expressed or implied, including any warranty of merchantability or fitness, nor is protection from any law or patent to be inferred. All patent rights are reserved. The exclusive remedy for all proven claims is replacement of our materials and in no event shall we be liable for special, incidental or consequential damages.



# Product No. 1799-052 Blue Duratec® Vinyl Ester **Fairing Primer**

**Data Sheet  
Continued**

**Page: 2**

## **Product Properties**

All time calculations are based on temperatures of 77°F, 25°C

### **Viscosity**

As measured on a Brookfield Viscometer Model RVF, Spindle #5 at 20 rpm: .....2100-2600 cps

Thixotropic Index:..... 6.5

### **Gel Time**

Sample based on a 100 g mass catalyzed at 2 percent with mekP: ..... 13-19 min

Weight per Gallon:..... 6.78 lb., 3.08 kg

### **Coverage per Gallon**

10 mil wet film thickness: ..... 100-115 ft<sup>2</sup>

250 micron wet film thickness:..... 10.2-10.7 m<sup>2</sup>

Revised 06-23-15



## **Hawkeye Industries**

P. O. Box 415, Bloomington, CA 92316  
(USA) 800-977-0060 • (Outside USA) 909-546-1160 • Fax 909-546-1161  
Email: hawkeyesales@hawkeyeind.com • www.duratec1.com

Limited/ warranty statement: Our products are intended for sale to industrial and commercial customers. We request that customers inspect and test our products before use and satisfy themselves as to contents and suitability. Nothing herein shall constitute a warranty, expressed or implied, including any warranty of merchantability or fitness, nor is protection from any law or patent to be inferred. All patent rights are reserved. The exclusive remedy for all proven claims is replacement of our materials and in no event shall we be liable for special, incidental or consequential damages.